


EL-72/5M (PVT) High Efficiency PV-Thermal Module

Everlight Solar modules EL-72/5P (PVT) Series are leaders in sunlight conversion efficiency. The PVT modules offer high performance and are designed specifically to meet customer demands for commercial and residential applications.

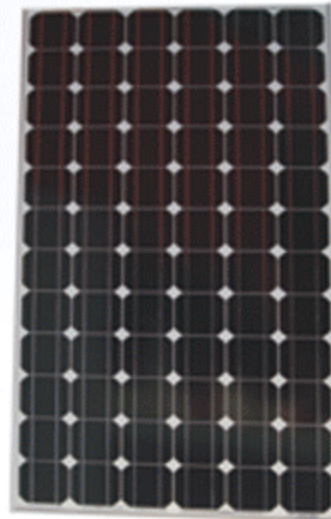

COMBINATION

The thermal water circuit guarantees stability and maximum solar power yields. Yield reductions as a result of excessive heating in the summer or snow in the winter are prevented. The heat carrier fluid can effectively cool or warm the solar cells equally when needed.

DEFROSTING SNOW

Water can be pumped through the PVT module until the snow has defrosted or slid down.

WATER PUMP

The combination water/ water heat pump can be seen as the most effective form of the connection to PVT module. The heated up stored substance is increased to a higher temperature while the return flow is cooled.

USE OF A BLOWER

Using an electrical blower, the flow temperature of the module can be lowered to reach an electrical increase in capacity in a closed circuit.

MIN POWER LOSSES

A PV System that uses the EL-60/5T modules becomes a high efficient system that minimizes power losses due to the fact that the PV modules interact with a thermal exchanger and recovers excess heat using a medium, maintaining the module's temperature at 35°C.


High Efficiency PV-Thermal Module

FEATURES

- 20% increased efficiency compared to conventional photovoltaic modules.
- Lowers thermal stressing.
- Produces more electricity than conventional models at elevated temperatures.
- Highly efficient operation of the modules by controlling the temperature of the PV panels.
- Advanced surface texturing process increase light absorption and efficiency.
- Tempered glass, EVA laminated and weatherproof back sheet provide long-life and enhanced cell performance.
- Special glass treatment ensures outstanding performance even in low-light conditions.
- Bypass diodes ensure functionality even if module is partially shaded.
- During winter months, the hot water can be used to supply homes and commercial buildings with heat.
- Lighter weight and cost effective installation.
- 25-year limited warranty on power output, 5-year limited warranty on materials and workmanship.

MODULE CHARACTERISTICS AND DIAGRAM


Type	PV-Thermal
Capacity	170W-185W
Cell type	Polycrystalline Si
No of Cells and connections	72 in series
Cell size	125x125mm
Weight (PV + Thermal)	15.5kg
Frame	Anodized aluminum alloy type
Connection	Lead wire with MC connector
Operating Temperature	-40.....+85°C

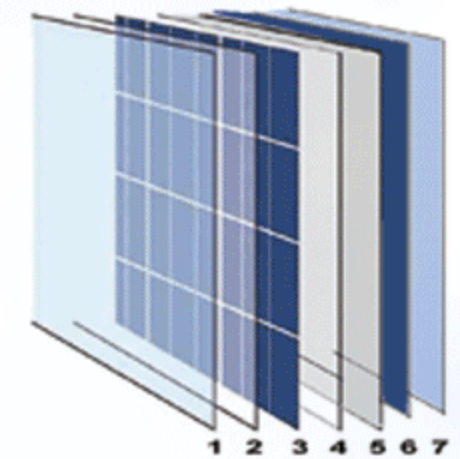

1. Tempered glass
2. EVA
3. Cells
4. EVA
5. Triple-layer back sheet
6. Thermal Collector
7. Plexiglass

THERMAL CHARACTERISTICS

No of EL-60/6PVT220 modules	1 module	5 module in series
Thermal Power (Pth)	300-600 Watt	1500-3000 Watt
Pressure (dyn)	0.15 bar (1.2 lt/min)	0.8 bar (1.2 lt/min)
Pressure (test)	10 bar	10 bar
Pressure (differential)	<0.05 bar	<0.05 bar
Flow rate	0.1 lt/min to 2 lt/min	0.1 lt/min to 2 lt/min
Cooling Liquid (water/glycol)	60% / 40%	60% / 40%

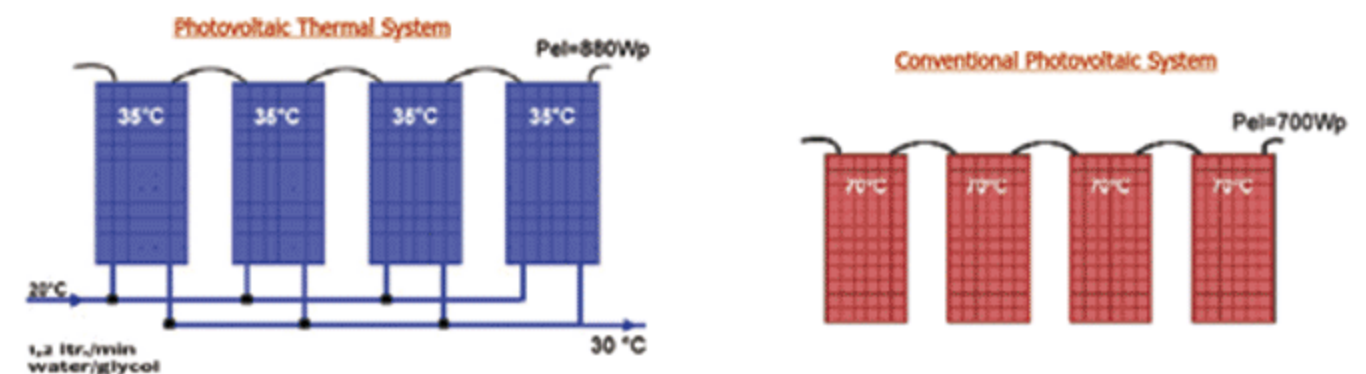

A PV System that uses the EL-60/PVT module becomes a Photo-Voltaic/Thermal System, a system that minimizes power loss due to high module temperatures, because the PV module interacts with a thermal exchanger and recovers excess thermal energy using a medium, in this case a water/glycol mix, and keeps the module at 35°C.

Worldwide Sales Agent
Blue Dragon Trade Limited
Room 2301, 23/F, World-Wide House, 19 Des
Voeux Road, Wan Chai, Hong Kong
Tel: +852 2916 8888 Fax: +852 2830 8800
URL: www.bd-trade.com



Manufacture-China
Helios Photovoltaic Co., Ltd.
Unit 3A, 86 West Wujin Avenue, 213164, Changzhou,
Jiangsu Province, China
Tel: +86 519 8648 8901/2/3 Fax: +86 519 8648 2889
URL: www.helios-pv.com




Headquarters
Everlight Corporation Ltd.
2506, West Tower, Shun Tak Centre, 168-200 Connaught
Road, Central, Hong Kong
Tel: +852 6614 4916 Fax: +852 2815 1975
URL: www.everlight-solar.com


ELECTRICAL CHARACTERISTICS				
Model	EL-72/5M170	EL-72/5M175	EL-72/5M180	EL-72/5M185
Maximum power (Pmax)	170W	175W	180W	185W
Voltage at max. power (Vmp)	36.93V	37.08V	37.36V	37.65V
Current at max. power (Imp)	4.639A	4.738A	4.817A	4.895A
Open circuit voltage (Voc)	45.77V	45.92V	46.28V	46.49V
Short circuit current (Isc)	4.953A	5.080A	5.214A	5.305A
Temperature coefficient of Isc	(0.065 ± 0.015)%/°C			
Temperature coefficient of Voc	-(160 ± 20)mV/°C			
Temperature coefficient of power	-(0.45 ± 0.05)%/°C			
Operating temperature	-40/+85°C			
MECHANICAL CHARACTERISTICS				
Cell type	125 x 125 monocrystalline solar cell			
Cell array	72 pieces in a 12 x 6 matrix connected in series			
Dimensions (mm)	1580 X 808 X 35			
Weight (kg)	16.5			
Frame	Clear anodized aluminum alloy type universal frame; silver color			
Construction	Front: High-transmission 3.2mm tempered glass Back: Polyester Encapsulant: EVA			

Electrical Curves


Electrical performance (Cell temperature: 25°C)

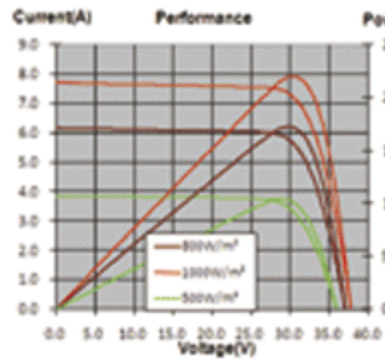



Temperature dependence of Isc, Voc and Pmax

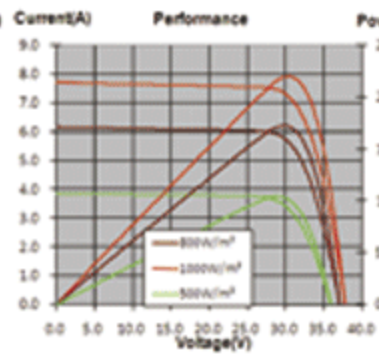

Irradiance dependence of Isc, Voc and Pmax (Cell temp: 25°C)

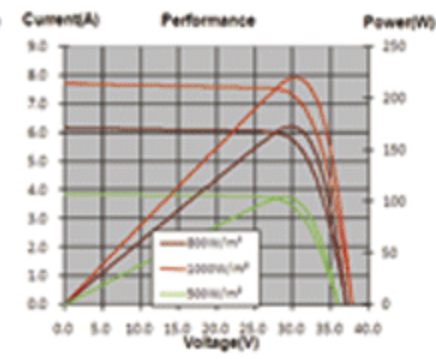

Power Output of Conventional modules over temperature

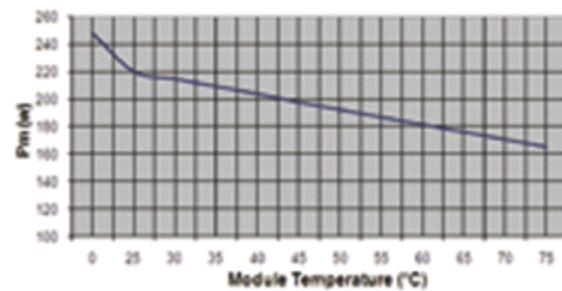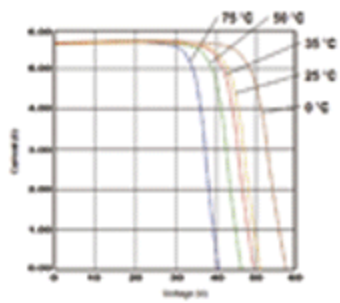

Standard Test Conditions (STC): 1000W/m2 solar irradiance, 1.5 air mass and cell temperature 25 °C.

Module Warranty: 25 year limited warranty for 80% power output, 10 year limited warranty for 90% power output, and 5 year limited warranty for materials and workmanship.

Stabilization period: The first few months of de-ployment; module power may decrease by approx. 1.5%.


Photovoltaic Thermal Collector Applications

PVT technology provides homes and buildings with renewable sources of hot water, heat and electric power.

The energy recovered can be used in numerous applications. In case of roof-top applications, 6 EL-60/6T modules can cover the need in hot water for a family, just like a solar water heater with 4m² absorber area. An underfloor heated house could also benefit from a PV/T system, since it can at least partially provide the thermal energy needed to heat the water, during daytime. If thermal storage is used, then a home can benefit from the PV/T System all day long. With the EL-60/6T a home can become truly environment friendly, reducing its CO2 emissions to a minimum

A PV/T System combined with a low temperature differential engine puts a house one step closer to energy independence and reduces further its carbon footprint. Using the combination of EL-60/6T and a low temperature differential engine, a PV Park's owner can benefit, not only from the higher efficiency provided by the module, but with transforming the amount of thermal energy collected to electrical power.

The components of the System include a Stirling engine, solar thermal collectors (EL-60, thermal storage, a hot water & space heater, and a Controller. The System provides the lowest cost of energy (heat and electricity) of any renewable energy system.

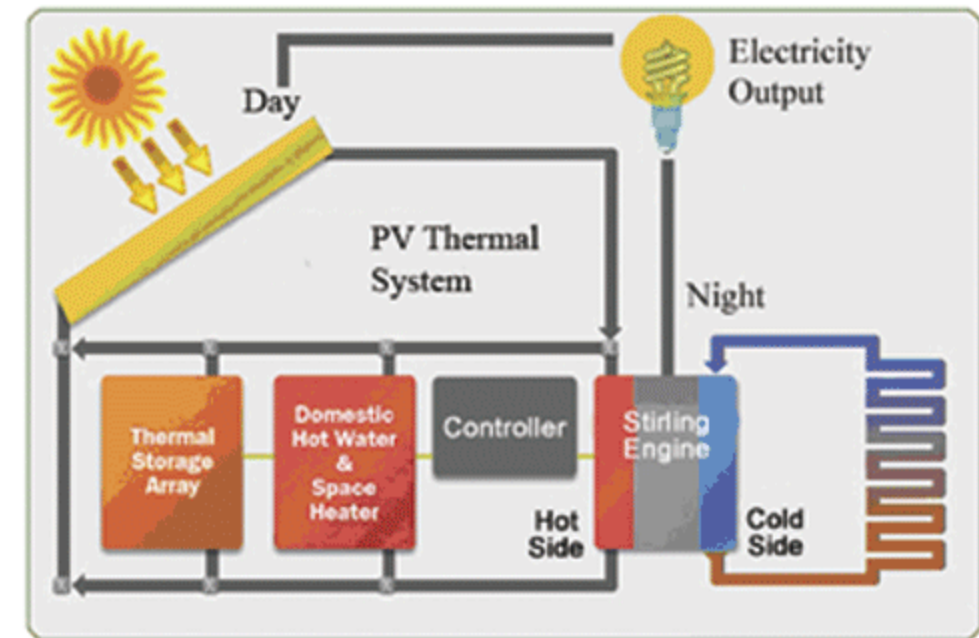

Larger PV/T Systems can be used in hotels covering at least a part of their need in hot water, and heating, especially in occasions that only a fraction of the hotel's capacity is booked, since using utilities that are designed to cover the maximum capacity, would be extremely uneconomical. Also a maintaining a heated pool during the winter would become a lot less expensive and environment friendly.

Order information: AC Heliotechniki is the wholesaler of Everlight products for the Mediterranean region. For any product information you can contact directly the local offices in Athens.

Note: Due to continuous innovation, research and production improvement, the specifications on the information sheet are subject to change without any notice. No rights can be derived from this product information sheet and Everlight assumes no liability whatsoever connected to or resulting from the use of any information contained herein.

Solar is the future
www.everlight-solar.com